

CLASSIC
WIRE & CABLE

Aluminum Building Wire

Aluminum building wire is widely used in conduit and cable tray installations for services, feeders, and branch circuits. CWC LowFriction® XHHW-2 and CWC LowFriction® THHN/THWN-2 support commercial, industrial, residential, and data center applications, delivering reliable power distribution and efficient installation performance.



CWC LowFriction®



Our Inventory

CWC LowFriction® XHHW-2 and CWC LowFriction® THHN/THWN-2 are stocked nationwide and available in red, blue, yellow, green, gray, purple, pink, tan, orange, brown, white, and black. Inventory is ready to ship quickly from our distribution centers across the country, with paralleling services available at each location to help simplify installation and improve jobsite efficiency.

Count on Classic for CWC LowFriction®

CABLE CONSTRUCTION



XHHW-2

Aluminum Conductor

Annealed compact stranded AA-8000 series Aluminum Conductor Material (ACM).


Insulation

XHHW-2: Low coefficient of friction, abrasion, moisture, and heat resistant colored crosslinked polyethylene (XLPE).

THHN / THWN-2: Low coefficient of friction, abrasion, moisture, and heat resistant colored polyvinyl chloride (PVC).

Covering

Low coefficient of friction, abrasion, moisture, and heat resistant translucent Nylon polyamide.

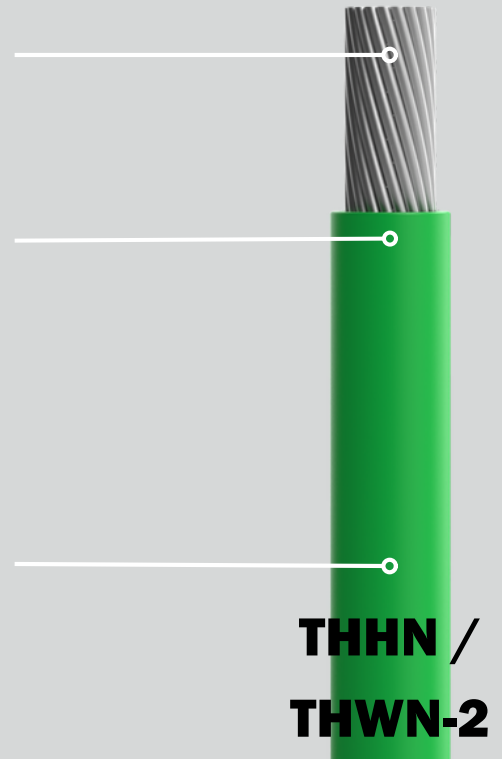

**THHN /
THWN-2**

WHY CLASSIC WIRE?

Engineered for Performance

Classic Wire's CWC LowFriction® XHHW-2 and CWC LowFriction® THHN/THWN-2 cable is manufactured and listed in accordance with UL standards and certifications.



Consistent Stock Availability

CWC LowFriction® XHHW-2 and CWC LowFriction® THHN/THWN-2 cable is stocked nationwide! We offer coast-to-coast delivery in 1-2 business days.



Trusted Across Markets

CWC LowFriction® XHHW-2 and CWC LowFriction® THHN/THWN-2 cable is trusted by customers across the industrial, data center, commercial, and renewable energy markets.



sales@classicwire.com



www.classicwire.com



800-298-3500